

# RS Series High-Speed Rotating/Swing/Grinding Tree Saw for Skid Steers



## CUT TREES. TRIM LIMBS. GRIND STUMPS.

The New RS Series introduces dual axis technology for both head rotation as well as the ability to swing the boom. These 2016 Turbo Saw's can be positioned horizontally for tree cutting, rotate vertically to trim limbs and sweep back and forth to grind stumps 12+” below the ground.


**NEW BLADE:** The RS Series features a new multisurface blade. Traditional blades are limited to cut with only the blade's perimeter. The new multi-surface blade can cut with the perimeter like a conventional blade and grind with the face like a stump grinder. **ONE SAW DOES IT ALL...TURBO-SAW**

The unit is an ideal for:

- High volume commercial cutting
- Stump Grinding 12+” below ground
- High speed pasture clearing
- Right-of-way clearing
- Trimming limbs along fence rows
- Cutting downed trees into logs

New Features:

- Multi-Surface Blade for Stump Grinding
- Stump Grinding 12+” Below Ground
- Swing Valve for Custom Feed-Rate Setting
- RPM Gauge for Performance Monitoring
- Herbicide/Diesel Compatible Sprayer Pump
- Brass Sprayer Tips & Fittings
- No Grease Zerk Rotate Design
- Easy Access Panels for Service

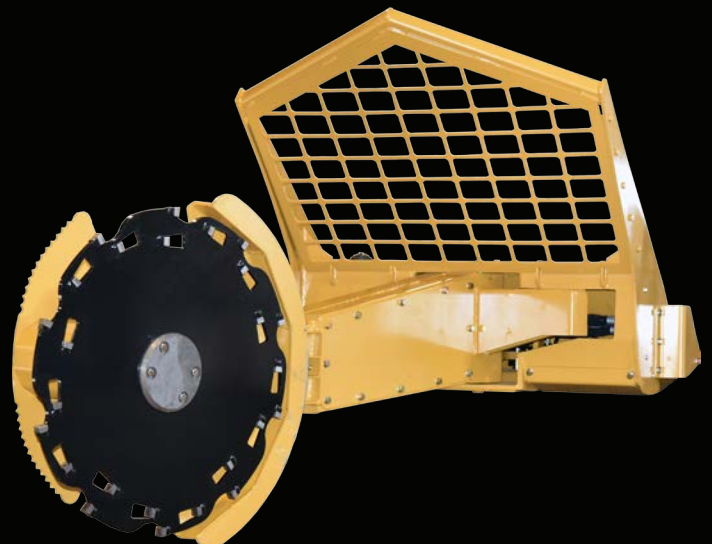



# Specifications:

<i>Model</i>	RS2600	RS3000	RS3400
<i>Horse Power Requirement</i>	60+ hp	70+ hp	80+ hp
<i>Hydraulic Requirements</i>	15-23 gpm	24-42 gpm	24-42 gpm
<i>Blade Diameter</i>	30"	30"	34"
<i>Blade Thickness</i>	1/2"	1/2"	1/2"
<i>Number of Teeth</i>	25 TS5 Carbide Teeth	25 TS5 Carbide Teeth	25 TS5 Carbide Teeth
<i>Cut Depth (One Pass)</i>	18"	18"	18"
<i>Maximum Diameter Stump</i>	30"	30"	34"
<i>Cutting Rate</i>	3-6" per second	6-10" per second	6-10" per second
<i>Dimensions (L x W x H)</i>	84" x 46" 48"	84" x 46" 48"	84" x 46" 48"
<i>Weight</i>	975lbs	1,050lbs	1,200lbs
<i>Price</i>			

